

## KLIXON® | M1 and 11041 Series

### 1/2" Disc Hermetic Thermostats, -65°F to 550°F, SPST

#### FEATURES

- Single Pole / Single Throw (SPST)
- Preset temperature set points, non-adjustable calibration
- High resistance to shock and vibration
- Hermetically sealed, vacuum baked and back-filled with nitrogen
- Various mounting configurations available
- Qualified to MIL-PRF-24236/1

#### INTRODUCTION

The Klixon® M1/11041 series of thermostats are engineered for exceptional vibration and shock resistance to provide reliable switching in the most demanding applications. Prior to the final weld, finished assemblies are vacuum baked and back-filled with dry nitrogen. The inert, dry atmosphere eliminates moisture and other volatilizs to prevent condensation at low temperatures or possible contact contamination at high temperatures. This back-fill also improves the dielectric characteristics of the device and prevents oxidation of the contacts. The M1 thermostat is the ideal choice where quality and reliability are paramount.

#### SPECIFICATIONS

Contact Ratings (Resistive)	Cycles	30VDC / 30VAC	125VAC	250VAC
	100,000	5.0 amps	2.0 amps	1.0 amps
50,000	5.5 amps	3.0 amps	1.5 amps	
25,000	6.0 amps	4.0 amps	2.0 amps	
10,000	6.5 amps	5.0 amps	2.5 amps	
5,000	7.0 amps	6.0 amps	3.0 amps	
<b>Operating Temperature</b>	-65°F to 550°F (-53.9°C to 287.8°C)			
<b>Dielectric Strength</b>	1250 VAC, rms, 60 cycles for 1 minute, terminal to case per MIL-STD-202, Method 301			
<b>Contact Resistance</b>	0.050 ohms maximum per MIL-STD-202, Method 307			
<b>Insulation Resistance</b>	100 megohms min. at 500 VDC			
<b>Vibration</b>	5-2000 Hz, 20G, per MIL-STD-202, Method 204, Condition D (monitored) 5-1000 Hz, 100G, per MIL-STD-202, Method 204, Condition D (unmonitored) 1000-2000 Hz, 50G, per MIL-STD-202, Method 204, Condition D (unmonitored)			
<b>Shock</b>	100G, 6 milliseconds, per MIL-STD-202, Method 213			
<b>Hermeticity</b>	1 x 10 <sup>-8</sup> atm cc/sec. maximum, per MIL-STD-202, Method 112, Condition C			
<b>Salt Spray</b>	Per MIL-STD-202, Method 101, Condition B, 5% solution			
<b>Average Weight</b>	4.8 grams (without bracket) to 5.9 grams (with bracket)			
<b>Ambient Temperature Range</b>	-80°F to +550°F (-62.2°C to 287.8°C) <i>Maximum ambient exposure while in the closed position is 200°F above contact closing temperature.</i>			

## STANDARD TEMPERATURE SETTINGS

OPERATING TEMPERATURE		DIFFERENTIAL		TOLERANCE	
°F	°C	°F	°C	± °F	± °C
- 65	- 53.9	30	16.7	10	5.6
- 40	- 40	30	16.7	10	5.6
- 15	-26.1	30	16.7	10	5.6
0	- 17.8	20	11.1	5	2.8
10	- 12.2	20	11.1	5	2.8
20	- 6.7	20	11.1	5	2.8
30	- 1.1	20	11.1	5	2.8
40	4.4	20	11.1	5	2.8
50	10.0	20	11.1	5	2.8
60	15.6	20	11.1	5	2.8
70	21.1	20	11.1	5	2.8
80	26.7	20	11.1	5	2.8
90	32.2	20	11.1	5	2.8
100	37.8	20	11.1	5	2.8
110	43.3	20	11.1	5	2.8
120	48.9	20	11.1	5	2.8
130	54.4	20	11.1	5	2.8
140	60.0	20	11.1	5	2.8
150	65.6	20	11.1	5	2.8
160	71.1	20	11.1	5	2.8
170	76.7	20	11.1	5	2.8
180	82.2	20	11.1	5	2.8
190	87.8	20	11.1	5	2.8
200	93.3	20	11.1	5	2.8


OPERATING TEMPERATURE		DIFFERENTIAL		TOLERANCE	
°F	°C	°F	°C	± °F	± °C
210	98.9	30	16.7	8	4.4
220	104.4	30	16.7	8	4.4
230	110.0	30	16.7	8	4.4
240	115.6	30	16.7	8	4.4
250	121.1	30	16.7	8	4.4
260	126.7	30	16.7	8	4.4
270	132.2	30	16.7	8	4.4
280	137.8	30	16.7	8	4.4
290	143.3	30	16.7	8	4.4
300	148.9	30	16.7	8	4.4
310	154.4	40	22.2	12	6.7
320	160.0	40	22.2	12	6.7
330	165.6	40	22.2	12	6.7
340	171.1	40	22.2	12	6.7
350	176.7	40	22.2	12	6.7
375	190.6	40	22.2	12	6.7
400	204.4	40	22.2	12	6.7
425	218.3	40	22.2	12	6.7
450	232.2	40	22.2	12	6.7
475	246.1	70	38.9	25	13.9
500	260	70	38.9	25	13.9
525	273.9	70	38.9	25	13.9
550	287.8	70	38.9	25	13.9
<i>Consult factory for additional temperatures</i>					

## STANDARD CONFIGURATIONS


MM / (INCHES)

No Bracket | SPST (Single Pole, Single Throw)

Straight Terminals

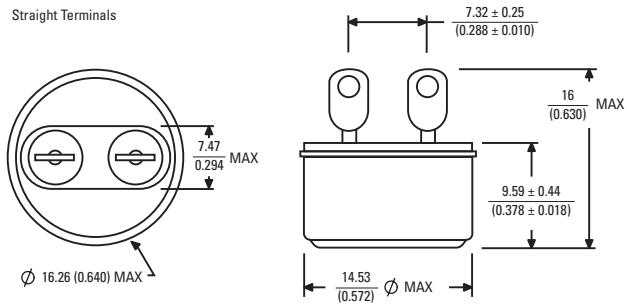


Bent Terminals

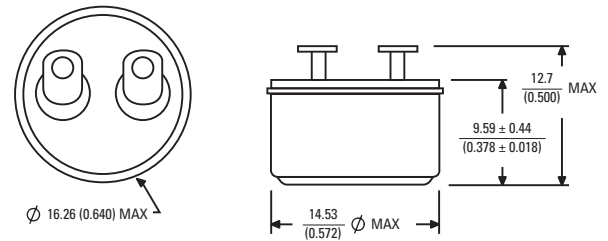

NOTE: Stud mount, surface and top mounting brackets are available. Dimensions listed are for reference only. Please contact Sensata for more detailed envelope drawings.

## STANDARD PART NUMBER BUILDER

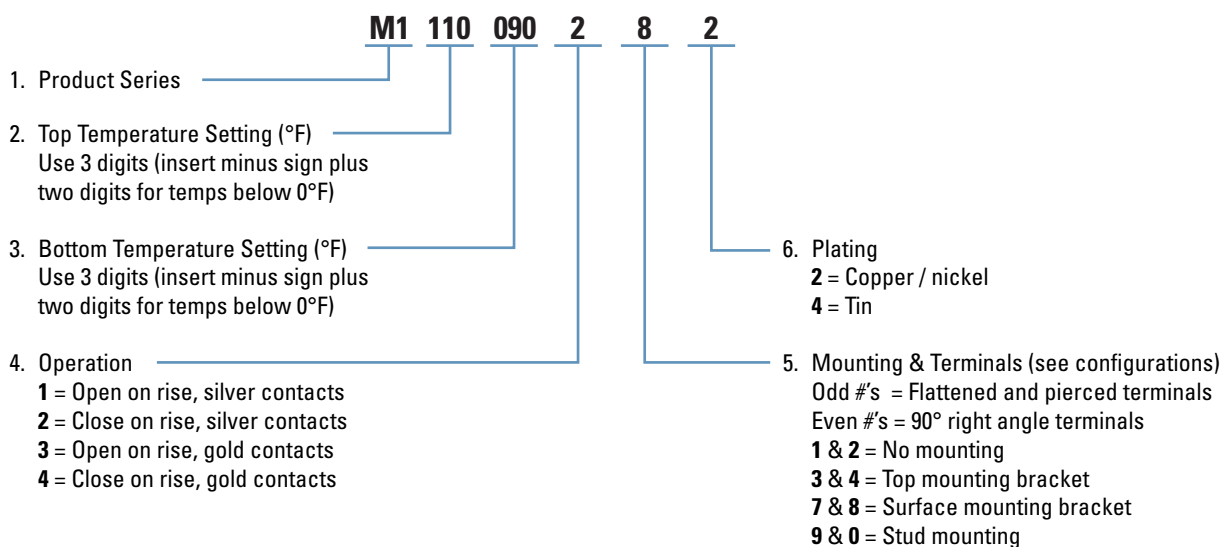

The example above describes a M1 series thermostat which closes on temperature rise at 110°F, opens at 90°F, has silver contacts, a surface mounting bracket, 90° bent terminals, and is plated with copper/nickel

Standard configurations are available as the M1 series and are described above. Many other configurations are available as the 11041 series. The M1/11041 can also be custom packaged to meet your specific design requirements.

*This document is generated from the Klixon® Precision Products Catalog # 2455009004 printed in October 2010*

## BUSINESS CENTERS

**Sensata Technologies Inc.**  
529 Pleasant Street  
Attleboro, MA 02703, USA  
Phone: +1 508-236-3287  
Brands: Klixon™, Sensata Technologies™

**Sensata Technologies**  
807 Woods Road  
Cambridge, MD 21613, USA  
Phone: +1 410-228-1500  
Brands: Airpax™

**Sensata Technologies**  
4467 White Bear Lake Parkway  
St. Paul, MN 55110, USA  
Phone: +1 800-553-6418  
Brands: Dimensions™

**Sensata Technologies Holland B.V.**  
Kolthofsingel 8  
7602 EM Almelo, The Netherlands  
Phone: +31 546 87 95 55  
Brands: Klixon™, Sensata Technologies™

**Sensata Technologies China Co., Ltd.**  
Novel Plaza, 8th Floor  
128 Nanjing Road West  
Shanghai, 20003  
People's Republic of China  
Phone: +86 21 23061500  
Brands: Klixon™, Sensata Technologies™

**Sensata Technologies Korea Ltd.**  
29F, Trade Tower  
159-1 SamSung-Dong, KangNam-Ku, Seoul  
135-729, Korea  
Phone: +81-2-551-2918  
Brands: Klixon™, Sensata Technologies™

**Sensata Technologies Japan Ltd.**  
305, Tanagashira  
Oyama-cho, Sunto-gun, Shizuoka-ken  
Japan, 410-1396  
Phone: +81 550 78 1211  
Brands: Klixon™, Sensata Technologies™



Important Notice: Sensata Technologies (Sensata) reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Sensata advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current. Sensata assumes no responsibility for infringement of patents or rights of others based on Sensata applications assistance or product specifications since Sensata does not possess full access concerning the use or application of customers' products. Sensata also assumes no responsibility for customers' product designs.

<http://www.sensata.com/>