


4

3

2

1

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED



CODE KLIXON[®]
MADE IN USA
AND TI PART NO.

.760 / .740




CHARACTERISTICS

- 1. BASIC THERMOSTAT: 3BT STYLE
- 2. DIELECTRIC STRENGTH: 1250 VAC FOR 1 MINUTE
TERMINALS TO CASE
- 3. MATERIAL: #300 STAINLESS STEEL

NOTES:

- 1. ORIENTATION OF CONNECTOR TO DEVICE CENTERLINE IS NOT CONTROLLED.

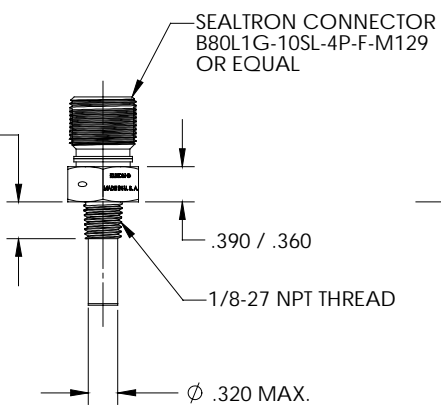


SEALTRON CONNECTOR
B80L1G-10SL-4P-F-M129
OR EQUAL

.422 / .362

.390 / .360

1/8-27 NPT THREAD

∅ .320 MAX.

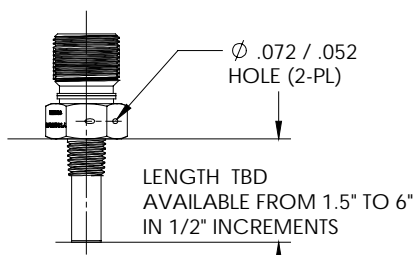

∅ .072 / .052
HOLE (2-PL)

LENGTH TBD
AVAILABLE FROM 1.5" TO 6"
IN 1/2" INCREMENTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES				
TOLERANCES ON FRACTIONS DECIMALS ANGLES				
DRAWN S. MARQUIS		DATE 3/25/02		TEXAS INSTRUMENTS ATILEBORO MA 02705
ENGINEER		APPROVED		
MATERIAL		APPROVED		THERMOSTAT SWITCH ENVELOPE DRAWING
SIGNATURES ON FILE. REFER TO ELECTRONIC CHANGE NOTICE.		SIZE B	CODE IDENT NO. 82647	21557 STYLE
SCALE			SHEET	

NEITHER THIS PRINT NOR THE INFORMATION CONTAINED THEREON IS TO BE USED AGAINST THE INTEREST OF TEXAS INSTRUMENTS, INC. OR AGAINST THE INTERESTS OF ANY OF ITS AFFILIATED COMPANIES OR WHOLLY OWNED SUBSIDIARIES.

FOR REFERENCE ONLY CONSULT TEXAS INSTRUMENTS CUSTOMER SERVICE FOR LATEST REVISION BEFORE USE

4

3

2

1