



60CP SERIES

Ceramic Capacitive Pressure Sensor 5VDC Supply, Ratiometric Output

DESCRIPTION

The 60CP series pressure sensors are ideally suited for environmentally demanding industrial applications. Using a 5.0 V excitation input, the 60 series sensors provides a .5-4.5 V signal ratiometric output proportional to pressure. This design requires no end user amplification. Several housing options are available.

Sensata Technologies has been a leading global supplier of pressure sensors and switches for over 50 years.

FEATURES

- Enhanced accuracy over wide operating range
- Housing options are compatible with most media
- EMC protection to 100 V/m
- Broad operating temperature range (-40°C to 135°C)
- Exceptional shake and vibration tolerance
- Overvoltage and reverse polarity protection
- Small size and simple installation


APPLICATIONS

- Compressors & pumps
- Hydraulics & pneumatics
- Agriculture & construction equipment
- Transportation & off-road vehicles
- Engine controls & monitors
- Alternative energy management
- Load management
- Process control & automation
- Medical
- Military


PERFORMANCE CHARACTERISTICS

Pressure Ranges	0 to 15, 50, 100, 150, 250, 500 psi 0 to 750 psi
Accuracy	±0.8% F.S. (linearity, hysteresis, repeatability and calibration) Static error band @ 25°C, 5.0VDC
Total Error Band	±1.0% (-20°C to +85°C) ±1.5% (-40°C to +125°C)
Operating Temperature	-40°C to +135°C
Storage Temperature	-40°C to +150°C
Proof Pressure	5X 15 to 75 psi, 3X 100 to 300 psi, 2X 500 psi, 1.5X 750psi
Burst Pressure	1700 psi
Cycle Life	15 to 500 psi = 10M F.S. cycles 750 psi = 5M F.S. cycles
Random Vibration	11g (50 to 2000 Hz)
Mechanical Shock	100g (6 Hz, ½ sine)
Drop (any Axis)	1.5m
Electrical Connection	Nema 4X, IP65
Supply Voltage	4.5 to 5.5 VDC
Output Voltage	0.5 to 4.5 VDC
Supply Current	7 mA (max @ 5.5 VDC no load)
Output Current	2.5 mA (max sinked or source)
Output Load	2K ohms minimum
Output Response Time	10mS max
Overvoltage Protection	16.5 VDC
Reverse Voltage	-14 VDC
Short Circuit Protected	Yes
EMC (1 MHz to 1GHz)	100 V/m
ESD (CDF-AEC-Q100-002)	15 kV
Approvals	RoHS, REACH available

DIMENSIONAL DRAWINGS (61CP02 & 67CP03)

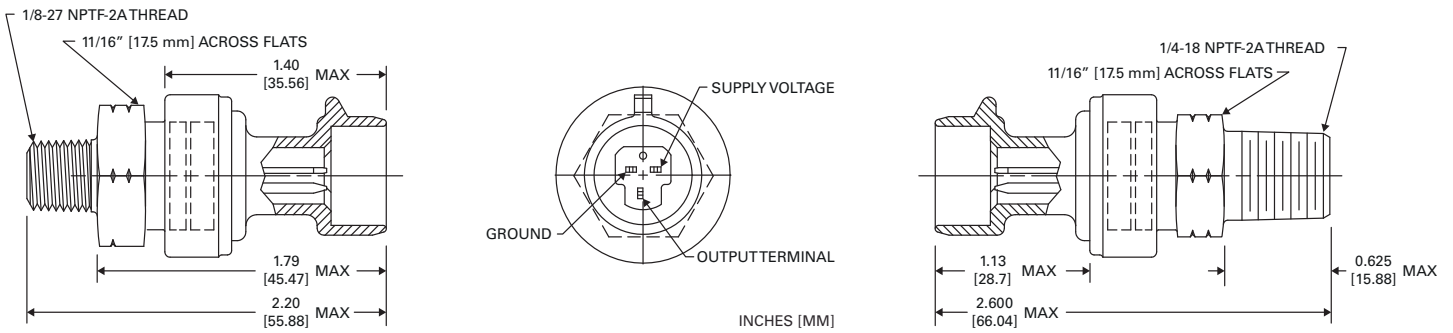

PART NUMBER DECISION TABLE

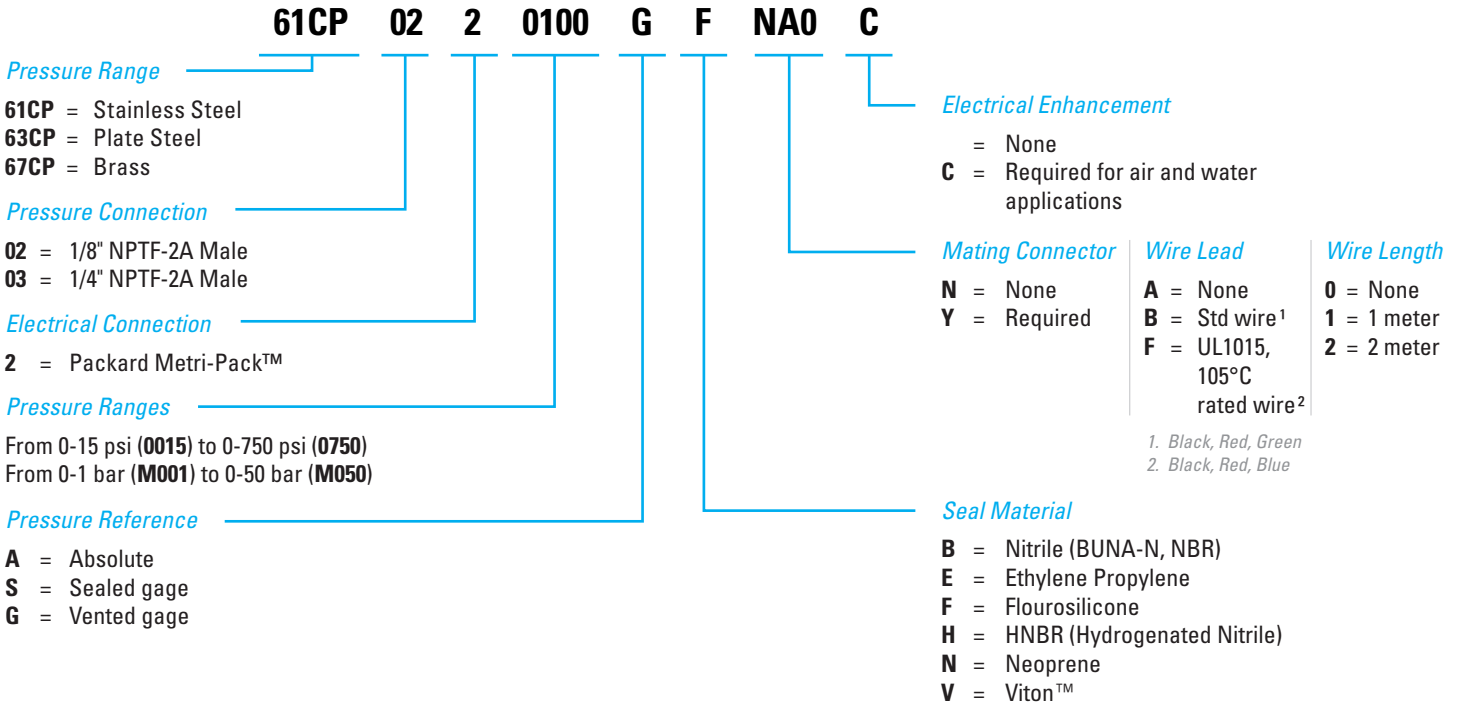

SEAL COMPATIBILITY GUIDE

Seal Material	Media Compatibility	Max Seal Temperature Range
Nitrile (BUNA-N, NBR)	Petroleum oils, lubricants, detergent solutions, helium	-20°C to 100°C
HNBR (Hydrogenated Nitrile)	Petroleum oils, lubricants, detergent solutions	-20°C to +135°C
Ethylene Propylene	Steam, soaps, polar solvents, brake fluids, acetone, Skydrol™	-40°C to +135°C

Seal Material	Media Compatibility	Max Seal Temperature Range
Fluorosilicone	Chlorinated solvents, oils, fuels, air	-40°C to +135°C
Neoprene	Refrigerants (freons/ammonia)	-40°C to +120°C
Fluorocarbon (Viton™)	Fertilizers, freons, butanes, oils, trichlorethylene	-35°C to +135°C



Important Notice: Sensata Technologies (Sensata) reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Sensata advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current. Sensata assumes no responsibility for infringement of patents or rights of others based on Sensata applications assistance or product specifications since Sensata does not possess full access concerning the use or application of customers' products. Sensata also assumes no responsibility for customers' product designs.

www.sensata.com

1.888.438.2214

sensors@sensata.com